basIP

AA-07BD

ENTRANCE PANEL



Description

AA-07BD SILVER multi-apartment metal entrance panel is just perfect for office buildings, apartment complexes, and cottage settlements.

The discussed model incorporates vandal-proof metal mechanical buttons.

Thanks to the additional illumination of the buttons, it will be easier for the user to dial the number of the apartment even at night.

Specifications

Panel type	**Multi-apartment**
Display	**4.3'' TFT, color with backlight**
Keyboard	**Backlight mechanical buttons**
Camera	**1/4"**
Resolution	**2 Mpx**
Camera angle	**110° (horizontal)**
Output video	**Half HD (1280 × 720), H.264 Main Profile**
Night backlight	**6 LEDs**
Light sensitivity	**0,01 LuX**
Protection class	**IP65**
IK-Code	**IK07**
Working temperature	**-40 — +65 °C**
Power consumption	**6,5 W, in standby — 3,6 W**
Power supply	**+12 V DC**
Body	**Aluminum**
Colors	**Silver**
Dimensions for installation	**141 × 351 × 60 mm**
Size of the pane	**155 × 375 × 55 mm**
Installation	**Flush, surface with BR-AA7 bracket**

Main features

- 4.3'' TFT, color with backlight
- Camera resolution 2.0 MP
- UKEY mobile access
- Concierge calling
- Calling the lift to the floor
- Flexible system setup
- Protection class IP65
- Working temperature -40 – +65 °C
- Fault alert
- Automatic configuration
- Log all events
- Open API

Functional capabilities


Interface	Multi-language graphical and WEB interface
Lock opening	By means of a monitor By QR code By guest link By Pin By access card The BAS-IP Intercom app The BAS-IP Link app The BAS-IP UKEY app From API
Identifiers in the panel memory (QR codes, cards, key fobs, UKEY, access codes)	20 000
Integration with ACS	Wiegand
Built-in Wiegand output for card, key fob, and UKEY identifiers	26, 32, 34, 37, 40, 42, 56, 58, 64, 80 bits
Connection of the additional SH-12 module and its support	Wiegand input: from 6 to 128 bits inclusive Wiegand output for card, key fob, UKEY, QR, Face, Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.
Shortcut buttons	Concierge button
Number of call melodies	4 polyphonic melodies, ability to customize melodies for different actions
Authentication	Separate password for settings, WEB – interface and RTSP stream
Additionally	Software Link support, SIP P2P, Built-in relay, Proximity sensor, Open API

Color variations




SILVER

Flush mounting

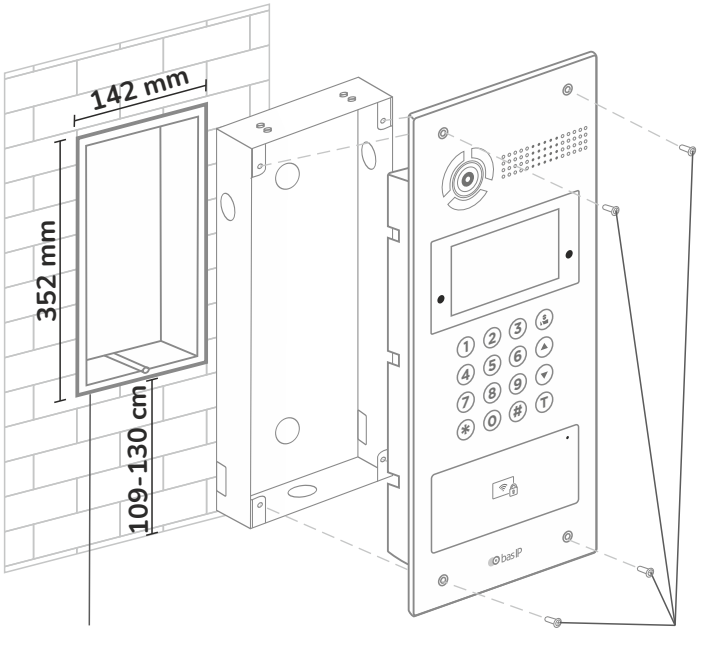

Niche Outdoor Panel Screws

Surface mounting
(with BR-AA7 or BR-AA7C brackets)

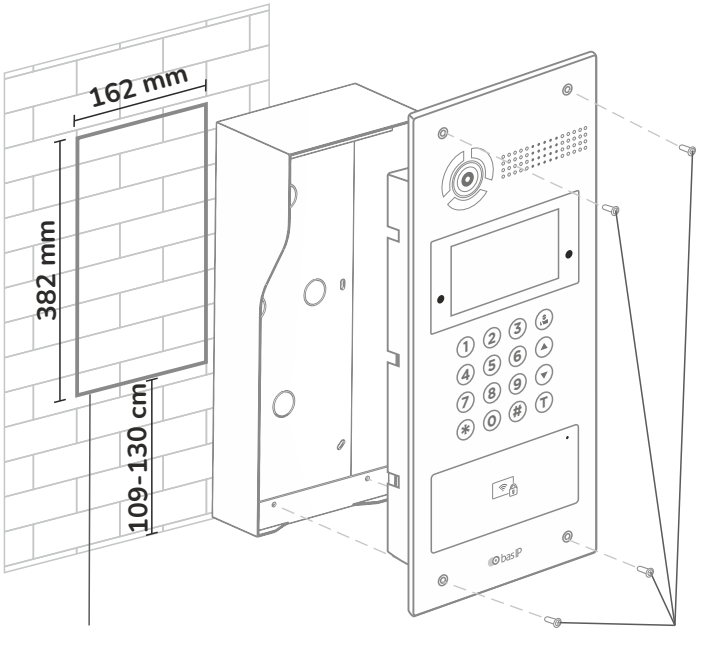

Mounting area Outdoor Panel Screws

Surface Mount Brackets BR-AA7 (standard) and BR-AA7C (all-weather) are not included in the box and must be purchased separately.