


AA-12FBI

ENTRANCE PANEL

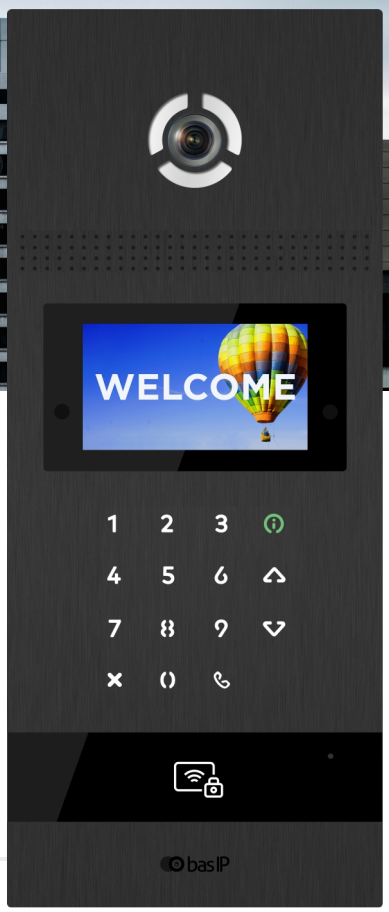

Description

The unique multi-apartment outdoor panel has a stylish design. Calling panels are available in gold, silver and black colors. The calling panel supports **BAS-IP UKEY** mobile access and allows direct calls to both internal monitors and the concierge. The device fits perfectly into the interior of a small office or cottage

The panel has a unique feature — face recognition*.
This identifying technology is integrated into the BAS-IP panels and uses the camera of the outdoor panel and infrared sensors for its operation.

Specifications

Panel type	**Multi-apartment**
Display	**4.3" TFT, color with backlight**
Keyboard	**Backlight piezo buttons**
Induction Loop Output	**Yes**
Camera	**1/4"**
Resolution	**2 Mpx**
Camera angle	**110° (horizontal) / 50° (vertical)**
Output video	**Full HD (1920 × 1080), H.264 Main Profile**
Night backlight	**6 LEDs**
Light sensitivity	**0,01 LuX**
Protection class	**IP65**
IK-Code	**IK07**
Working temperature	**-40 — +65 °C**
Power consumption	**6,5 W, in standby — 3,6 W**
Power supply	**+12 V DC**
Body	**Aluminum**
Colors	**Silver / Black / Gold**
Dimensions for installation	**142 × 358 × 58 mm**
Size of the pane	**161 × 382 × 49 mm**
Installation	**Flush, surface with BR-AA12 bracket**

Main features

- 4.3" TFT, color with backlight
- Automatic face recognition
- Camera resolution 2.0 MP
- UKEY mobile access
- Concierge calling
- Calling the lift to the floor
- Flexible system setup
- Protection class IP65
- Working temperature -40 – +65 °C
- Remote add faces
- Fault alert
- Automatic configuration
- Log all events
- Open API

The specifications and appearance of the device may differ from those stated or may change without prior notice.

Functional capabilities

Interface	Multi-language graphical and WEB interface
Lock opening	By means of a monitor Face Recognition Identification By QR code By guest link By Pin By access card By license plates The BAS-IP Intercom app The BAS-IP Link app The BAS-IP UKEY app From API
Identifiers in the panel memory (QR codes, cards, key fobs, UKEY, access codes)	20 000
Face recognition identifications	10 000 faces
Integration with ACS	Wiegand
Built-in Wiegand output for card, key fob, and UKEY identifiers	26, 32, 34, 37, 40, 42, 56, 58, 64, 80 bits
Connection of the additional SH-12 module and its support	Wiegand input: from 6 to 128 bits inclusive Wiegand output for card, key fob, UKEY, QR, Face, Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.
Connection for an external induction loop	Socket (female) TRS output, Low-frequency Audio signal 1.2V; 8.2 kOhm
Shortcut buttons	Concierge button
Number of call melodies	4 polyphonic melodies, ability to customize melodies for different actions
Authentication	Separate password for settings, WEB – interface and RTSP stream
Additionally	Software Link support, SIP P2P, Built-in relay, Proximity sensor, Open API

Color variations



BLACK




SILVER



GOLD

Flush mounting

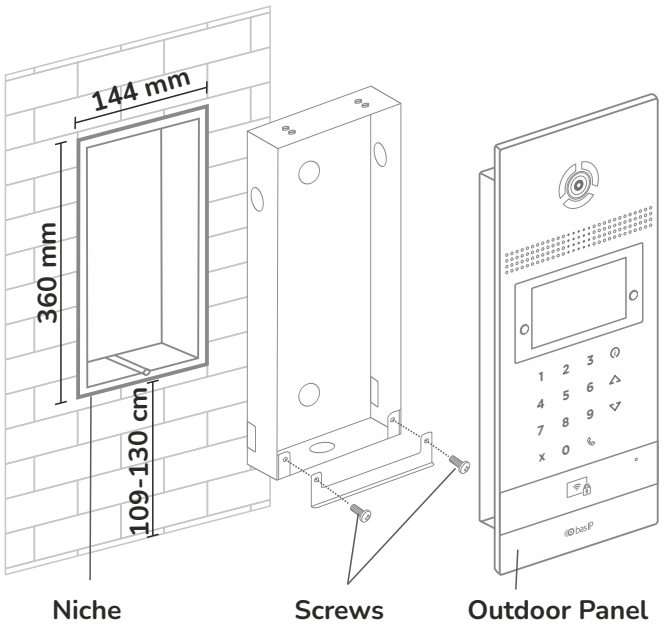

Surface mounting
(with BR-AA12)

