


AA-14FBIS

ENTRANCE PANEL

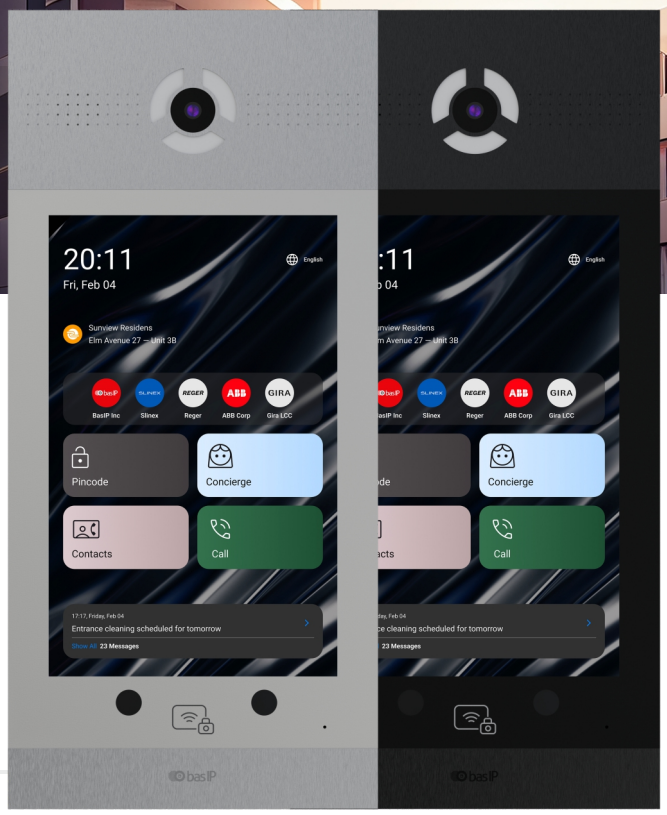

Description

BAS-IP AA-14FBIS is a multifunctional intercom panel that combines advanced technologies with stylish design, ensuring both security and comfort.

Features such as a phone book, concierge and elevator call functions make the panel more user-friendly. The flexible system configuration allows for customization according to individual needs.

The panel is equipped with an output for connection to an induction loop.

Specifications

Panel type	**Multi-apartment**
Display	**10” IPS, color with backlight and heated**
Keyboard	**Touch screen**
Induction Loop	**Yes**
Camera	**1/4”**
Resolution	**2 Mpx**
Camera angle	**110° (horizontal) / 64° (vertical)**
Output video	**Full HD (1920 × 1080), H.264 Main Profile**
Night backlight	**6 LEDs**
Light sensitivity	**0,01 LuX**
Protection class	**IP65**
IK-Code	**IK06**
Working temperature	**-40 — +65 °C**
Power consumption	**6,5 W, in standby — 3,6 W**
Power supply	**+12 V DC and PoE IEEE802.3at**
Body	**Aluminum**
Colors	**Silver / Black**
Dimensions for installation	**172 × 373 × 58 mm**
Size of the pane	**185 × 400 × 45 mm**
Installation	**Flush, surface with BR-AA14 bracket**

Main features

- 10” touch screen
- Protection class IP65
- Automatic face recognition
- Working temperature -40 – +65 °C
- Camera resolution 2.0 MP
- Individual menu design
- UKEY mobile access
- Remote add faces
- Phone book
- Fault alert
- Concierge calling
- Automatic configuration
- Calling the lift to the floor
- Log all events
- Flexible system setup
- Open API

The specifications and appearance of the device may differ from those stated or may change without prior notice.

Functional capabilities

Interface	**Multi-language graphical and WEB interface**
Lock opening	**By means of a monitor** **Face Recognition Identification** **By QR code** **By guest link** **By Pin** **By access card** **By license plates** **The BAS-IP Intercom app** **The BAS-IP Link app** **The BAS-IP UKEY app** **From API**
Identifiers in the panel memory (QR codes, cards, key fobs, UKEY, access codes)	**20 000**
Face recognition identifications	**10 000 faces**
Integration with ACS	**Wiegand**
Built-in Wiegand output for card, key fob, and UKEY identifiers	**26, 32, 34, 37, 40, 42, 56, 58, 64, 80 bits**
Connection of the additional SH-12 module and its support	**Wiegand input: from 6 to 128 bits inclusive** **Wiegand output for card, key fob, UKEY, QR, Face, Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.**
Output for connecting an external induction loop for the hearing impaired	**Low-frequency Audio signal 1.2V; 8.2 kOhm.**
Type of output for connecting an external induction loop	**Socket (female) TRS**
Shortcut buttons	**Concierge button**
Number of call melodies	**4 polyphonic melodies, ability to customize melodies for different actions**
Authentication	**Separate password for settings, WEB – interface and RTSP stream**
Additionally	**Software Link support, SIP P2P, Built-in relay, Proximity sensor, Open API, Hermetic back cover**

Color variations




BLACK




SILVER


Appearance and mechanical mounting

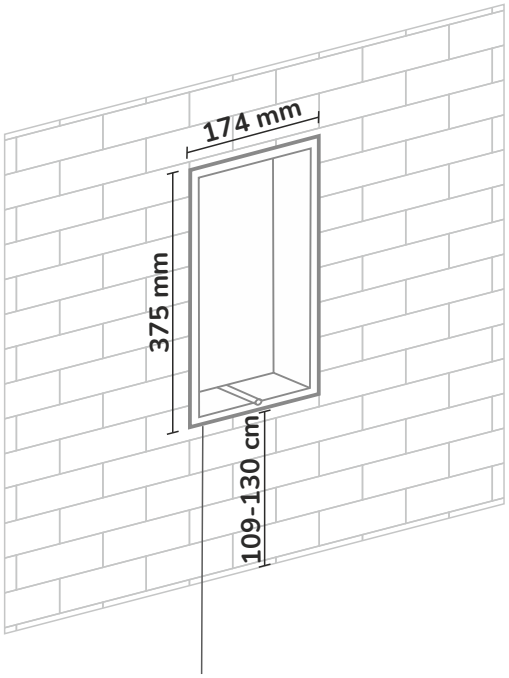

Niche

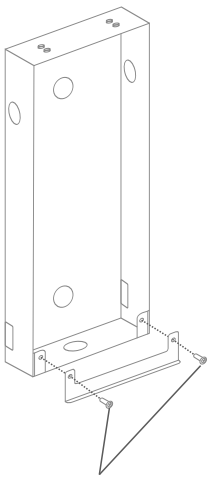

Screws

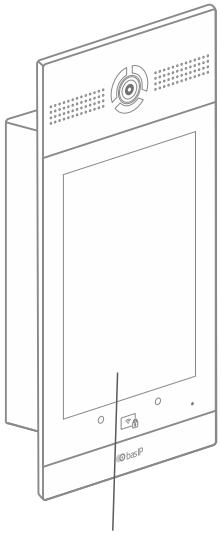

Outdoor Panel