


AV-03BD

ENTRANCE PANEL

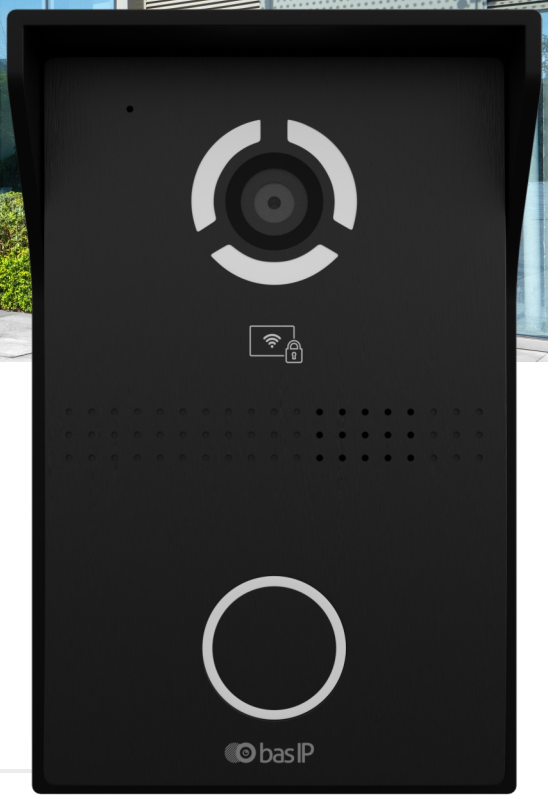

Description

BAS-IP AV-03BD is a stylish entrance panel, which will undoubtedly fit perfectly into the interior of any office center.

The panel is made of high-quality plastic and can be utilized in virtually any indoor space.

AV-03BD is available in silver and black. It supports **BAS-IP UKEY** mobile access.

Specifications

Panel type	**Induvidial**
Camera	**1/4”**
Resolution	**2 Mpx**
Camera angle	**90° (horizontal)**
Output video	**HD (1280 × 720), H.264 Main Profile**
Night backlight	**6 LEDs**
Light sensitivity	**0,01 LuX**
Protection class	**IP64**
IK-Code	**IK06**
Working temperature	**-40 — +65 °C**
Power consumption	**6,5 W, in standby — 2,5 W**
Power supply	**+12 V DC, PoE 802.3af**
Body	**ABS plastic**
Colors	**Black / Silver**
Size of the pane	**102 × 160 × 46 mm**
Installation	**Surface mount with and without a hood (brackets included)**

Main features

- Camera resolution 2.0 MP
- Software Link support
- UKEY access control
- Protection class IP64
- Touch call button
- IK-Code IK06
- PoE and +12V DC
- Output video 720p
- Plastic case
- Working temperature -40 – +65 °C

Functional capabilities

Interface	Multi-language graphical and WEB interface
Lock opening	By means of a monitor By QR code By guest link By access card The BAS-IP Intercom app The BAS-IP Link app The BAS-IP UKEY app From API
Identifiers in the panel memory (QR codes, cards, key fobs, UKEY, access codes)	20 000
Integration with ACS	Wiegand
Built-in Wiegand output for card, key fob, and UKEY identifiers	26, 32, 34, 37, 40, 42, 56, 58, 64, 80 bits
Connection of the additional SH-12 module and its support	Wiegand input: from 6 to 128 bits inclusive Wiegand output for card, key fob, UKEY, QR, Face, Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.
Shortcut buttons	1 touch call button
Number of call melodies	4 polyphonic melodies
Authentication	Separate password for settings, WEB – interface and RTSP stream
Additionally	Software Link support, SIP P2P, Built-in relay, Open API

Color variations



BLACK



SILVER

Appearance and mechanical mounting

